


Contactors Part Number Assembler

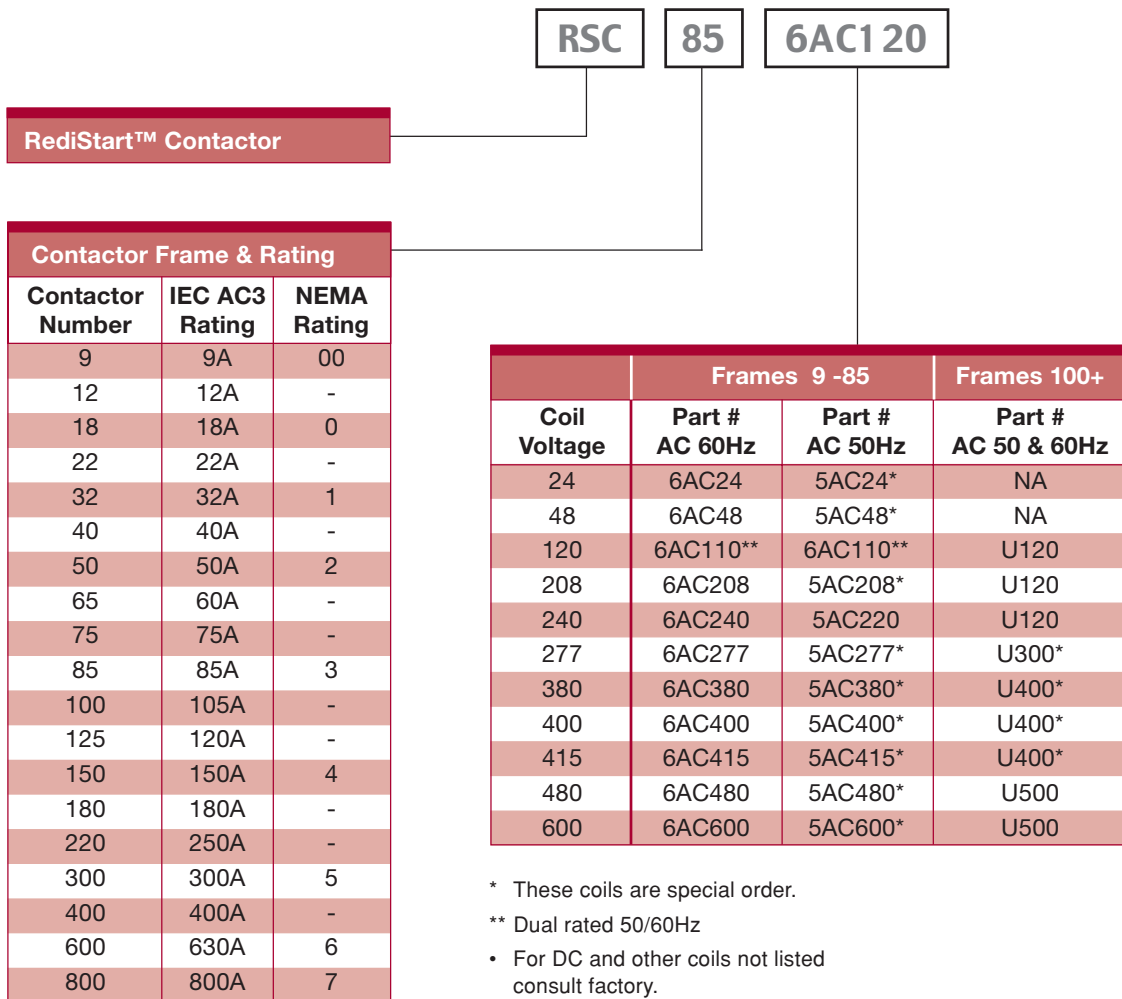

RediStart™ Contactor

Contactor Frame & Rating		
Contactors Number	IEC AC3 Rating	NEMA Rating
9	9A	00
12	12A	-
18	18A	0
22	22A	-
32	32A	1
40	40A	-
50	50A	2
65	60A	-
75	75A	-
85	85A	3
100	105A	-
125	120A	-
150	150A	4
180	180A	-
220	250A	-
300	300A	5
400	400A	-
600	630A	6
800	800A	7

Coil Voltage	Frames 9 -85		Frames 100+
	Part # AC 60Hz	Part # AC 50Hz	Part # AC 50 & 60Hz
24	6AC24	5AC24*	NA
48	6AC48	5AC48*	NA
120	6AC110**	6AC110**	U120
208	6AC208	5AC208*	U120
240	6AC240	5AC220	U120
277	6AC277	5AC277*	U300*
380	6AC380	5AC380*	U400*
400	6AC400	5AC400*	U400*
415	6AC415	5AC415*	U400*
480	6AC480	5AC480*	U500
600	6AC600	5AC600*	U500

- * These coils are special order.
- ** Dual rated 50/60Hz
- For DC and other coils not listed consult factory.
- 60 hz coils may be de-rated by 16% for 50 hz operation.
- U120 coils are universal 100 - 240VAC / 100 - 220VDC (100 - 400A frames only).
- U500 coils are universal 440 - 600VAC.
- 600 and 800 frame coils are 100 - 127VAC for U120.
- For 600 and 800 contactors, 240V only, use U200.

Contactors - Ratings and Pricing



RSC SERIES

UL / IEC RATED													
MODEL NUMBER	AMP RATINGS				UL HP RATINGS						AUX CONTACT		LIST PRICE
					ONE-PHASE		THREE-PHASE						
	AC1	AC3	AC4	UL	115V	230V	200V	230V	460V	575V	NO	NC	AC COIL
RSC-9-*	20	9	6	20	0.5	1	2	2	5	7.5	1	1	CF
RSC-12-*	25	12	9	25	0.5	2	3	3	7.5	10	1	1	CF
RSC-18-*	30	18	9	30	1	3	5	5	10	15	1	1	CF
RSC-22-*	32	22	13	32	2	3	7.5	7.5	10	15	1	1	CF
RSC-32-*	50	32	17	45	2	5	7.5	10	20	20	2	2	CF
RSC-40-*	60	40	24	50	3	5	10	10	25	25	2	2	CF
RSC-50-*	80	50	32	70	3	7.5	10	15	30	30	2	2	CF
RSC-65-*	100	65	47	80	5	10	15	20	40	40	2	2	CF
RSC-75-*	110	75	52	90	5	15	20	25	50	50	2	2	CF
RSC-85-*	135	85	62	100	7.5	15	25	30	60	60	2	2	CF
RSC-100-*	160	105	75	160	7.5	15	30	30	60	60	2	2	CF
RSC-125-*	160	120	90	160	10	20	40	40	75	75	2	2	CF
RSC-150-*	210	150	110	210	15	25	40	50	100	100	2	2	CF
RSC-180-*	230	180	150	230	15	30	60	60	125	125	2	2	CF
RSC-220-*	275	250	180	275	15	40	60	75	150	150	2	2	CF
RSC-300-*	350	300	220	350	-	-	100	100	200	200	2	2	CF
RSC-400-*	450	400	300	450	-	-	125	150	300	300	2	2	CF
RSC-600-*	660	630	400	660	-	-	150	200	400	400	2	2	CF
RSC-800-*	900	800	630	900	-	-	250	300	600	600	2	2	CF

NEMA RATED								
MODEL NUMBER	NEMA SIZE	NEMA HP RATING THREE PHASE				AUX CONTACTS		LIST PRICE
		200V	230V	460V	575V	N.O.	N.C.	
RSC-9-*	00	1.5	1.5	2	2	1	1	CF
RSC-18-*	0	3	3	5	5	1	1	CF
RSC-32-*	1	7.5	7.5	10	10	2	2	CF
RSC-50-*	2	10	15	25	25	2	2	CF
RSC-85-*	3	25	30	50	50	2	2	CF
RSC-150-*	4	40	50	100	100	2	2	CF
RSC-300-*	5	75	100	200	200	2	2	CF
RSC-600-*	6	150	200	400	400	2	2	CF
RSC-800-*	7	250	300	600	600	2	2	CF

* Add coil suffix. See page 1-7 for CONTACTOR part number assembler.

Web stocked